

Data sheet

Torque Transducer

Series M

(2 N·m – 10000 N·m)



Benefits/Application

- For static and dynamic moments
- Non-rotational construction
- Very high-cycle fatigue resistant up to 80 % of nominal load
- Extremely robust against side forces and bending moments
- Easy assembling, lots of possibilities

Options/Accessories

- Optional solid or plug-in connection
- Available from size 20 N·m with a redundant measuring circuit
- Tension-Torsion combination with Serie K

Technical data

2 - 500 N·m

Rated Torque		M_{nom}	N·m	2	5	10	20	50	100	200	500
Metrological Data	Accuracy class			0,05							
	Torque measurement range		%	1 - 100							
	Linearity error	d_{lin}	%	0,05							
	Interpolation error	f_c	%	0,4							
	Hysteresis	h	%	0,05							
	Reversibility error	v	%	0,2							
	Repeatability (f.s.)		%	0,003							
	Creep		%	0,025							
	Temperature effect on characteristic value per 10 K	TK_C	%/10 K	0,04							
	Temperature effect on zero signal per 10 K	TK_0	%/10 K	0,025							
	Characteristic value difference, anticlockwise/clockwise	d_{RL}	%	0,2							
	Electrical Data	Rated characteristic value	C_{nom}	mV/V	1,8	1,6	2				
Characteristic value tolerance		d_c	%	1)		0,2					
Zero signal deviation		$d_{S,0}$	%	0,5							
Input resistance		R_e	Ω	1100 - 1500							
Output resistance		R_a	Ω	800 - 1200							
Insulation resistance		R_{is}	Ω	$> 10^9$							
Operating range of excitation voltage		$B_{U,G}$	V	5 - 15							
Protection (DIN EN 60529)				IP 54							

2 - 500 N·m

Mechanical Data	Rated Torque	M_{nom}	N·m	2	5	10	20	50	100	200	500
	Rated torsion angle	j_{nom}	rad	0,01			0,018	0,013	0,011	0,009	0,007
	Torsional rigidity	c_T	N·m/rad	200	500	1000	1111	3846	9090	22220	71428
	Mass	m	kg	0,3			0,5	0,6	1,6		
	Fundamental resonant frequency	f_G	kHz	30				40	50	30	40
	Permissible oscillation stress		%	80							
	Torque limit		%	150							
Limits	Breaking torque		%	>300							
	Lateral force limit		kN	2	5	15	25	40	65	100	
	Bending moment limit	M_{bzul}	%	100							
	Axial force limit	F_{azul}	kN	5	10	20	40	60	90	160	
	Rated temperature range	$B_{T,nom}$	°C	10 - 60							
	Operating temperature range	$B_{T,G}$	°C	-40 - +120							

1) The individual n_{nom} value is specified on the name plate.

Technical data

1 - 10 kN·m

	Rated Torque	M_{nom}	N·m	1000	1500	2000	4000	5000	6000	10000	
Metrological Data	Accuracy class						0,05				
	Torque measurement range		%				1 - 100				
	Linearity error	d_{lin}	%				0,05				
	Interpolation error	f_c	%				0,4				
	Hysteresis	h	%				0,05				
	Reversibility error	v	%				0,2				
	Repeatability (f.s.)		%				0,003				
	Creep		%				0,025				
	Temperature effect on characteristic value per 10 K	TK_C	%/10 K				0,04				
	Temperature effect on zero signal per 10 K	TK_0	%/10 K				0,025				
	Characteristic value difference, anticlockwise/clockwise	d_{RL}	%				0,2				
	Electrical Data	Rated characteristic value	C_{nom}	mV/V				2			
		Characteristic value tolerance	d_c	%				0,2			
Zero signal deviation		$d_{s,0}$	%				0,5				
Input resistance		R_e	Ω				1100 - 1500				
Output resistance		R_a	Ω				800 - 1200				
Insulation resistance		R_{is}	Ω				$> 10^9$				
Operating range of excitation voltage		$B_{U,G}$	V				5 - 15				
Protection (DIN EN 60529)						IP 54					


1 - 10 kN·m

Mechanical Data	Rated Torque	M_{nom}	N·m	1000	1500	2000	4000	5000	6000	10000
	Rated torsion angle	j_{nom}	rad	0,006	0,0055	0,005	0,004			0,006
	Torsional rigidity	c_T	N·m/rad	$1,7 \cdot 10^5$	$2,7 \cdot 10^5$	$4 \cdot 10^5$	$1 \cdot 10^6$	$1,25 \cdot 10^6$	$1,5 \cdot 10^6$	$1,8 \cdot 10^6$
	Mass	m	kg	4,8			7,7	7,8	7,9	28
	Fundamental resonant frequency	f_G	kHz	1,5	1,9	2,3	1,7	1,9	2,2	1,6
	Permissible oscillation stress		%	80						
Limits	Torque limit		%	150						
	Breaking torque		%	300						
	Lateral force limit		kN	180	200	300	500	650	800	1000
	Bending moment limit	M_{bzul}	%	100						
	Axial force limit	F_{azul}	kN	250	300	400	700	850	1000	1500
	Rated temperature range	$B_{T,nom}$	°C	10 - 60						
	Operating temperature range	$B_{T,G}$	°C	-40 - +120						

*) Data on request


Cable connection

pluggable




Permanent connection end connected ¹⁾³⁾⁴⁾	Connection pluggable ¹⁾²⁾⁵⁾
------------------------------------------------------	----------------------------------------

7-pin LEMO Series 1
Female



7-pin LEMO Series 0
Female: - Male:



Connection		Pin
Supply voltage (+)	U_{in+}	3
Supply voltage (-)	U_{in-}	2
Measurement signal (+)	U_{out+}	1
Measurement signal (-)	U_{out-}	4
Sense (+)	Sense+	5
Sense (-)	Sense-	6
Shielding		Housing

- 1) View too weldingside
- 2) Female LEMO S.A. Typ: EGG.1B.307.CLL; Male: FGG.1B.307.CLA.D72
- 3) Up to size 10 N·m.
- 4) Cable lenght 0,5 m.
- 5) Available from size 20 N·m.




Permanent connection end connected (up to size 10 N·m)



Connection pluggable

- More cable types and lengths on request
- Available types of connectors for the cable:
D-Sub 9 pol ;D-Sub 15pol ;M-S 7pol ;LEMO Series1 7pol
- Configuration with customer defined connection is possible




Permanent connection end not connected¹⁾

Grey cable ²⁾
 Ø 6,5 mm
 6 x 0,25 mm²
 Temperature range: -35 °C to +90 °C


Black cable 6-pin ³⁾
 Ø 2,9 mm
 vibration-proof, 6 x 0,04 mm²
 Temperature range: -50 °C to +105 °C

Connection		Color	
Supply voltage (+)	U _{in+}	blue	
Supply voltage (-)	U _{in-}	black	
Measurement signal (+)	U _{out+}	white	
Measurement signal (-)	U _{out-}	red	
Sense (+)	Sense+	green	
Sense (-)	Sense-	grey	yellow
Shielding		yellow	grey

1) Cable length 5 m.
 2) Available from size 20 N·m
 3) Up to size 10 N·m

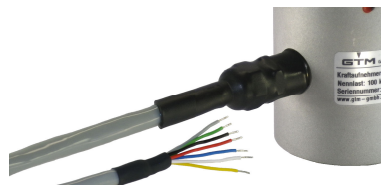

Permanent connection end not connected (Ø 6,5 mm)

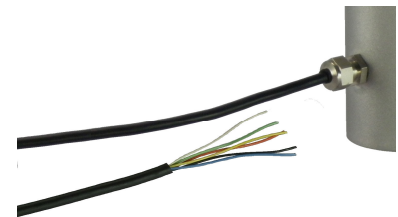

Permanent connection end not connected (Ø 2,9 mm)


Option: 2. Measuring circuit

- In case of two circuits the technical data are similarly valid for both circuits
- From size 20 N·m available
- The location of the cable outlet can be chosen on request

Mating dimensions

up to 10 N·m

Typ: 2 N·m - 10 N·m

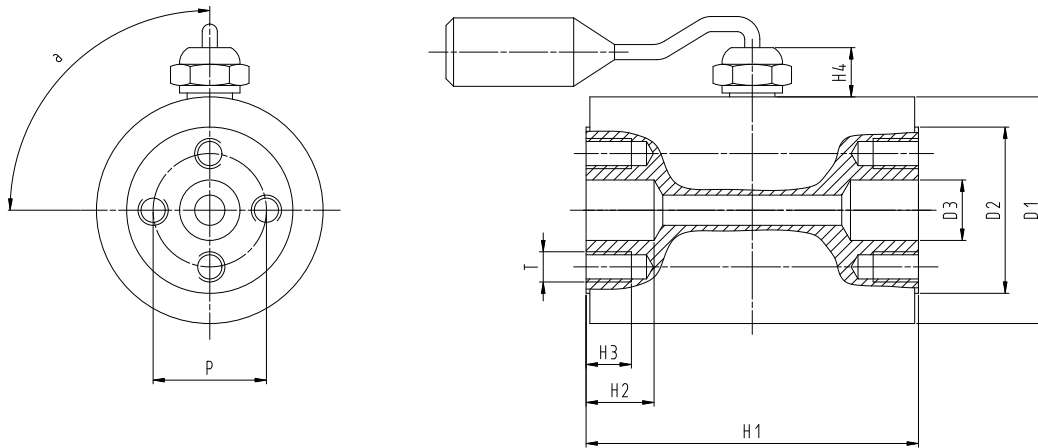


Rated Torque	M_{nom}	N·m	2 ; 5 ; 10
Diameter	$\varnothing D_1$	mm	30
Diameter	$\varnothing D_2$	mm	22
Diameter	$\varnothing D_3$	mm	8 _{H7}
Pitch circle diameter	$\varnothing P$	mm	15
Thread	T_1		M4
Height	H_1	mm	44
Height	H_2	mm	9
Height	H_3	mm	6
Height	H_4	mm	ca. 7
Angle	a		90°

Mating dimensions

from 20 N·m

Typ: 20 N·m - 10000 N·m

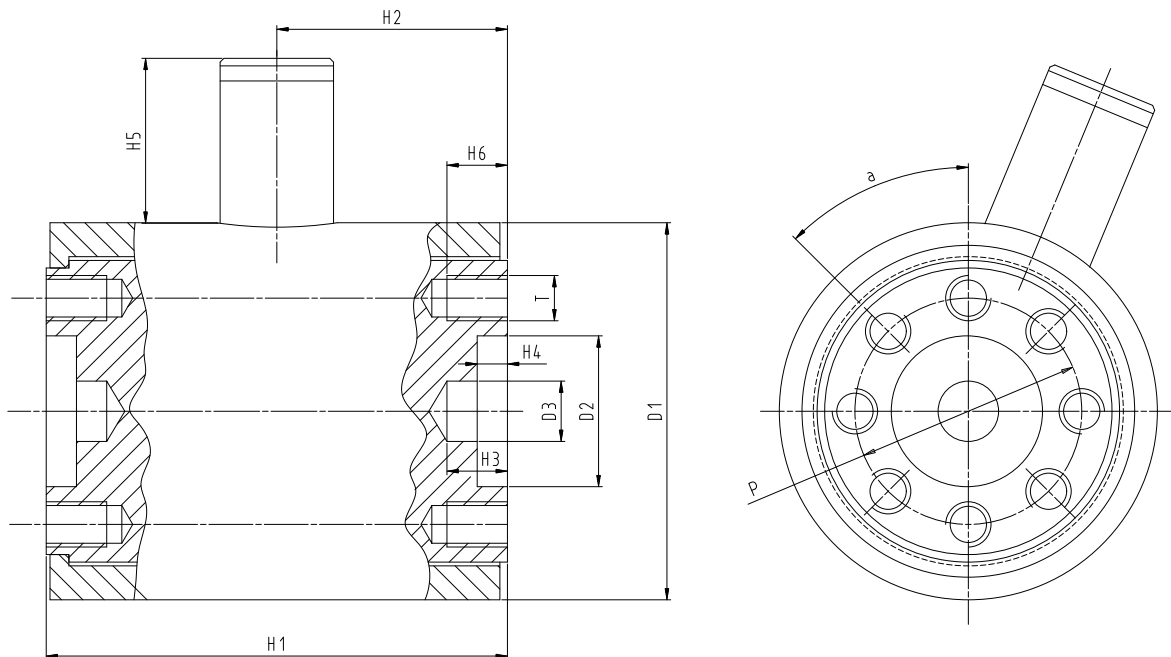

Rated Torque	M_{nom}	N·m	20	200	1000	4000	10000
			50	500	1500	6000	
			100		2000		
Diameter	$\varnothing D_1$	mm	50	73	107	141	205
Diameter	$\varnothing D_2$	mm	20 _{H7}	30 _{H7}	45 _{H7}	60 _{H7}	120 _{H7}
Diameter	$\varnothing D_3$	mm	8 _{H8}	10 _{H8}			
Pitch circle diameter	$\varnothing P$	mm	30±0,1	45±0,1	71±0,1	95±0,1	155±0,1
Thread	T_1		M6	M10	M16	M20	M24
Height	H_1	mm	61-0,1	82-0,1	107-0,1	130	170
Height	H_2	mm	30,5	41	54	65	85
Height	H_3	mm	8				12
Height	H_4	mm	4				8
Height	H_5	mm	22				
Height	H_6	mm	8	15	22	25	35
Angle	a		45°				

Änderungen vorbehalten. Alle Angaben beschreiben unsere Produkte in allgemeiner Form. Sie stellen keine vereinbarte Beschaffenheit im Sinne des § 434 Abs. 1 BGB dar.



GTM Testing and Metrology GmbH
 Philipp-Reis-Straße 4-6, 64404 Bickenbach, Germany
 www.gtm-gmbh.com
 Phone +49(0)6257-9720-0, Fax +49(0)6257-9720-77
 contact@gtm-gmbh.com